


ZMC1B...ZMC200B

Silicon Epitaxial Planar Zener Diodes

Features

- Fits onto SOD-323 / SOT-23 footprints
- MicroMELF package

LS-31

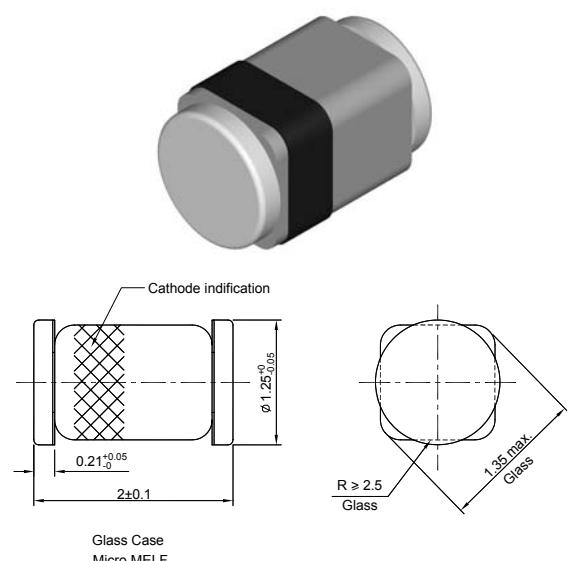

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Power Dissipation	P_{tot}	500 ¹⁾	mW
Junction Temperature	T_j	175	°C
Storage Temperature Range	T_{stg}	- 55 to + 175	°C

¹⁾ Valid provided that electrodes are kept at ambient temperature

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Max.	Unit
Thermal Resistance Junction to Ambient Air	R_{thA}	0.3 ¹⁾	K/mW
Forward Voltage at $I_F = 100 \text{ mA}$	V_F	1	V

¹⁾ Valid provided that electrodes are kept at ambient temperature



CHANGZHOU GUANGDA ELECTRONIC CO. LTD

ZMC1B... ZMC200B

Characteristics at $T_a = 25^\circ\text{C}$

Type	Zener Voltage ¹⁾			Dynamic Resistance			Reverse Leakage Current			Temp coefficient of Zener Voltage TKvz (%/K)
	$V_{Z\text{nom}}$	V_{ZT}	at I_{ZT}	Z_{ZT}	Z_{ZK}	at I_{ZK}	$T_a = 25^\circ\text{C}$	$T_a = 125^\circ\text{C}$	at V_R	
	(V)	(V)	(mA)	Max. (Ω)	Max. (Ω)	(mA)	Max. (μA)	Max. (μA)	(V)	
ZMC1B ²⁾	0.75	0.73...0.77	5	8	50	1	-	-	-	-0.26...-0.23
ZMC2B0	2	1.96...2.04	5	85	600	1	100	200	1	-0.09...-0.06
ZMC2B2	2.2	2.15...2.25	5	85	600	1	75	160	1	-0.09...-0.06
ZMC2B4	2.4	2.35...2.45	5	85	600	1	50	100	1	-0.09...-0.06
ZMC2B7	2.7	2.64...2.76	5	85	600	1	10	50	1	-0.09...-0.06
ZMC3B0	3	2.94...3.06	5	85	600	1	4	40	1	-0.08...-0.05
ZMC3B3	3.3	3.23...3.37	5	85	600	1	2	40	1	-0.08...-0.05
ZMC3B6	3.6	3.52...3.68	5	85	600	1	2	40	1	-0.08...-0.05
ZMC3B9	3.9	3.82...3.98	5	85	600	1	2	40	1	-0.08...-0.05
ZMC4B3	4.3	4.21...4.39	5	75	600	1	1	20	1	-0.06...-0.03
ZMC4B7	4.7	4.6...4.8	5	60	600	1	0.5	10	1	-0.05...+0.02
ZMC5B1	5.1	4.99...5.21	5	35	550	1	0.1	2	1	-0.02...+0.02
ZMC5B6	5.6	5.48...5.72	5	25	450	1	0.1	2	1	-0.05...+0.05
ZMC6B2	6.2	6.07...6.33	5	10	200	1	0.1	2	2	0.03...0.06
ZMC6B8	6.8	6.66...6.94	5	8	150	1	0.1	2	3	0.03...0.07
ZMC7B5	7.5	7.35...7.65	5	7	50	1	0.1	2	5	0.03...0.07
ZMC8B2	8.2	8.03...8.37	5	7	50	1	0.1	2	6.2	0.03...0.08
ZMC9B1	9.1	8.91...9.29	5	10	50	1	0.1	2	6.8	0.03...0.09
ZMC10B	10	9.8...10.2	5	15	70	1	0.1	2	7.5	0.03...0.1
ZMC11B	11	10.78...11.22	5	20	70	1	0.1	2	8.2	0.03...0.11
ZMC12B	12	11.76...12.24	5	20	90	1	0.1	2	9.1	0.03...0.11
ZMC13B	13	12.74...13.26	5	26	110	1	0.1	2	10	0.03...0.11
ZMC15B	15	14.7...15.3	5	30	110	1	0.1	2	11	0.03...0.11
ZMC16B	16	15.68...16.32	5	40	170	1	0.1	2	12	0.03...0.11
ZMC18B	18	17.64...18.36	5	50	170	1	0.1	2	13	0.03...0.11
ZMC20B	20	19.6...20.4	5	55	220	1	0.1	2	15	0.03...0.11
ZMC22B	22	21.56...22.44	5	55	220	1	0.1	2	16	0.04...0.12
ZMC24B	24	23.52...24.48	5	80	220	1	0.1	2	18	0.04...0.12
ZMC27B	27	26.46...27.54	5	80	220	1	0.1	2	20	0.04...0.12
ZMC30B	30	29.4...30.6	5	80	220	1	0.1	2	22	0.04...0.12
ZMC33B	33	32.34...33.66	5	80	220	1	0.1	2	24	0.04...0.12
ZMC36B	36	35.28...36.72	5	80	220	1	0.1	2	27	0.04...0.12
ZMC39B	39	38.22...39.78	2.5	90	500	0.5	0.1	5	30	0.04...0.12
ZMC43B	43	42.14...43.86	2.5	90	500	0.5	0.1	5	33	0.04...0.12
ZMC47B	47	46.06...47.94	2.5	110	600	0.5	0.1	5	36	0.04...0.12
ZMC51B	51	49.98...52.02	2.5	125	700	0.5	0.1	10	39	0.04...0.12
ZMC56B	56	54.88...57.12	2.5	135	700	0.5	0.1	10	43	0.04...0.12
ZMC62B	62	60.76...63.24	2.5	150	1000	0.5	0.1	10	47	0.04...0.12
ZMC68B	68	66.64...69.36	2.5	200	1000	0.5	0.1	10	51	0.04...0.12
ZMC75B	75	73.5...76.5	2.5	250	1000	0.5	0.1	10	56	0.04...0.12
ZMC82B	82	80.36...83.64	2.5	300	1500	0.25	0.1	10	62	0.05...0.12
ZMC91B	91	89.18...92.82	1	450	2000	0.1	0.1	10	68	0.05...0.12
ZMC100B	100	98...102	1	450	5000	0.1	0.1	10	75	0.05...0.12
ZMC110B	110	107.8...112.2	1	600	5000	0.1	0.1	10	82	0.05...0.12
ZMC120B	120	117.6...122.4	1	800	5500	0.1	0.1	10	91	0.05...0.12
ZMC130B	130	127.4...132.6	1	950	6000	0.1	0.1	10	100	0.05...0.12
ZMC150B	150	147....153	1	1250	6500	0.1	0.1	10	110	0.05...0.12
ZMC160B	160	156.8...163.2	1	1400	7000	0.1	0.1	10	120	0.05...0.12
ZMC180B	180	176.4...183.6	1	1700	8500	0.1	0.1	10	130	0.05...0.12
ZMC200B	200	196...204	1	2000	10000	0.1	0.1	10	150	0.05...0.12

¹⁾ Tested with pulse $t_p = 20 \text{ ms}$.

²⁾ The ZMC1B is a silicon diode with operation in forward direction. Hence, the index of all parameters should be "F" instead of "Z". Connect the cathode electrode to the negative pole.



CHANGZHOU GUANGDA ELECTRONIC CO. LTD